




材料：高力黄铜+固体润滑剂  
Material: CuZn25Al5Mn3Fe3  
+Graphite(500#SP)

相配座孔公差等级推荐H7  
Housing tolerance recommended H7

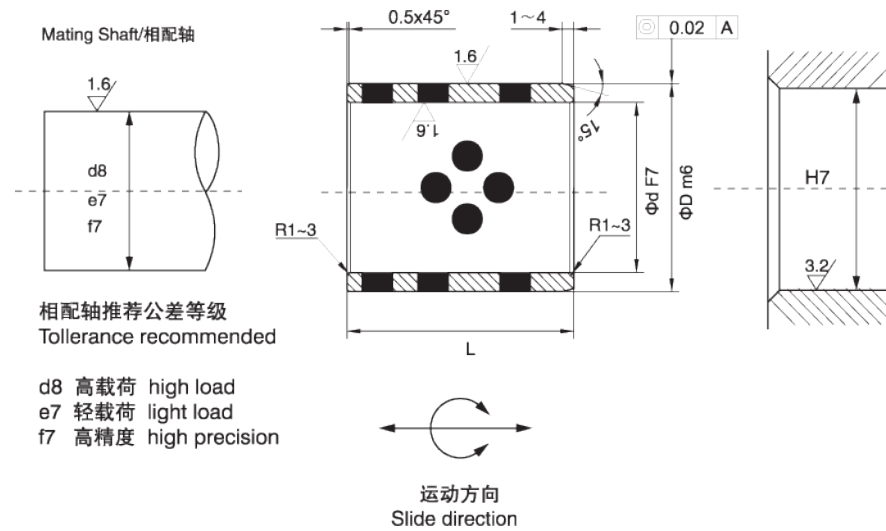

I.D. $\phi d$ 内径 F7	O.D. $\phi D$ 外径 m6	L $\begin{matrix} -0.10 \\ -0.30 \end{matrix}$														
		8	10	12	15	16	20	25	30	35	40	50	60	70	80	
8	+0.028 +0.013	12	+0.018 +0.007	●	●	●	●									
10	"	14	"	●	●	●	●	●								
12	+0.034 +0.016	18	"		●	●	●	●	●	●						
13	"	19	+0.021 +0.008		●		●	●								
14	"	20	"		●	●		●	●	●						
15	"	21	"		●	●	●	●	●	●						
16	"	22	"		●	●	●	●	●	●	●					
18	"	24	"			●	●	●	●	●	●	●				
20	+0.041 +0.020	28	"		●	●	●	●	●	●	●	●	●			
20	"	30	"			●	●	●	●	●	●	●				
22	"	32	+0.025 +0.009			●	●		●	●						
25	"	33	"			●	●	●	●	●	●	●	●			
30	"	38	"			●	●		●	●	●	●	●	●		
30	"	40	"			●	●		●	●	●	●	●			
32	+0.050 +0.025	42	"			●	●	●	●	●	●	●	●			
35	"	44	"					●	●	●	●	●	●			
35	"	45	"						●	●	●	●	●			
40	"	50	"						●	●	●	●	●	●	●	
45	"	55	+0.030 +0.011							●	●	●	●			
50	"	60	"							●	●	●	●	●	●	

I.D. $\phi d$ 内径 F7	O.D. $\phi D$ 外径 m6	L $\begin{matrix} -0.10 \\ -0.30 \end{matrix}$														
		30	35	40	50	60	70	80	100	120	130	140	150			
50	+0.050 +0.025	62	+0.030 +0.011	●	●	●	●	●	●							
50	"	65	"	●		●	●	●	●	●	●					
55	+0.060 +0.030	70	"			●	●	●	●							
60	"	74	"	●	●	●	●	●	●	●						
60	"	75	"	●	●	●	●	●	●	●	●					
63	"	75	"					●	●	●						
65	"	80	"					●	●	●	●					
70	"	85	+0.035 +0.013		●	●	●	●	●	●	●	●				
70	"	90	"					●	●	●	●					
75	"	90	"						●	●	●	●				
75	"	95	"							●	●	●	●			
80	"	96	"							●	●	●	●	●	●	
80	"	100	"							●	●	●	●	●	●	
90	+0.071 +0.036	110	"							●	●	●	●	●	●	
100	"	120	"								●	●	●	●	●	
110	"	130	+0.040 +0.015									●	●	●		
120	"	140	"										●	●	●	
125	+0.083 +0.043	145	"											●	●	
130	"	150	"											●	●	
140	"	160	"												●	
150	"	170	"												●	
160	"	180	"												●	

How to order: Code d D L  
订单方式: RSZ-3 08 10 12